





Stainless Steel Braided Flexible Pump Connectors

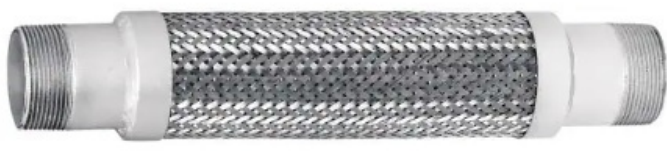

ASSEMBLY MATERIALS

- Hose:** 304 Stainless Steel Corrugated Hose .008 to .012 Wall
- Braid:** 304 Stainless Steel One Braid (8" and Larger IS A Braided-braid)
- Ends:** Carbon Steel Male NPT

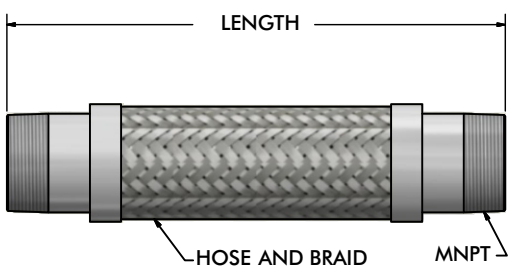

Model No. Nominal Bore x Overall Length	Working Pressure @ 70°F (PSIG)	Working Pressure @ 250°F (PSIG)	Static Bend Radius (inch)	Dynamic Bend Radius (inch)
EFMHPC-TC 0.50" x 6.5"	853	776	1.57	0.40
EFMHPC-TC 0.75" x 7"	640	583	1.96	0.66
EFMHPC-TC 1" x 8"	497	452	3.54	1.25
EFMHPC-TC 1.25" x 8.5"	426	387	3.54	1.32
EFMHPC-TC 1.50" x 9"	437	397	4.33	1.76
EFMHPC-TC 2" x 10.5"	444	404	6.69	2.64
EFMHPC-TC 2.50" x 12"	345	313	3.14	2.86
EFMHPC-TC 3" x 14"	289	262	3.54	4.84
EFMHPC-TC 4" x 16"	300	273	5.11	11

Maximum Permanent Offset From Centerline: 3/8"
 Maximum Intermittent Offset From Centerline: 3/8"